





## Main Features

- The active air filtration system has a robust structure with a weight of 130 kg.
- It operates very quietly with a noise level of maximum 62 dBA.
- It offers effective performance with a power capacity of 0.5 kW.
- It is equipped with 2 with brakes and 2 without wheels with  $\varnothing 75$  mm, which provides stability during movement.
- There is a lighting unit with a power of 12W and a of 3000K.
- The body sheet is made of AISI 304 quality stainless steel with a thickness of 2 mm, which increases durability.
- The suction system has features such as a replaceable carbon filter, an EC fan with adjustable speed, and a removable and cleanable inner filter.

## Structural Features

- The steam filter is made of 6 mm thick transparent tempered glass.
- Filter change period is determined by a counter and can be easily performed.
- It has a plug compatible with British or European standards, with a length of 200 cm.
- The body is made of AISI 304 quality stainless steel and the side panels compact laminate material.

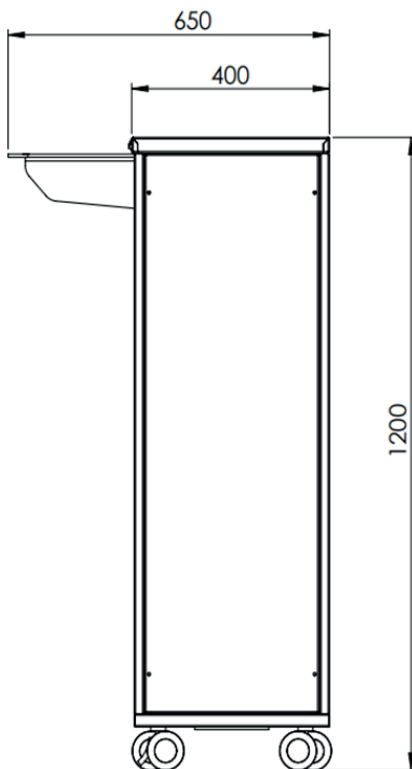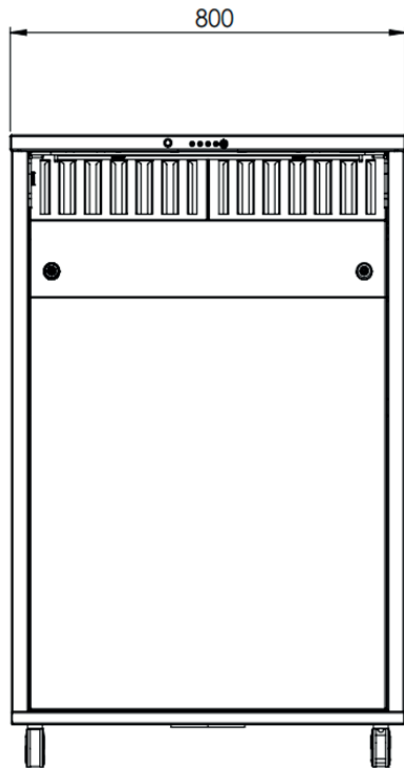


## Technical Information

Dimension	: 400x800x1270 mm
Power	: 0.5 kW
Body	: AISI 304 Stainless Steel
Weight	: 130 kg
Wheel	: 4 pcs, 2 with brake Ø75
Side Wall options	: <ul style="list-style-type: none"> <li>• AISI 304 Stainless Steel,</li> <li>• Compact Laminate 12 mm</li> <li>• Epoxy Powder Coated on Steel Sheet Metal</li> </ul>
Sound Level	: 62 max dBA
Suction	: Replaceable Carbon Filter-Speed Adjustable EC fan-Removable and Cleanable Flameguard Inner Filter Protective 6mm Glass
Lighting	: 3000K / 12W 1 Piece
Air Direction Glass	: Transparent Tempered Glass of 6 mm
Filter Change	: by Life Counter
Plug Type	: UK or EU
Cable Length	: 2000 mm



**F**



**G**

