



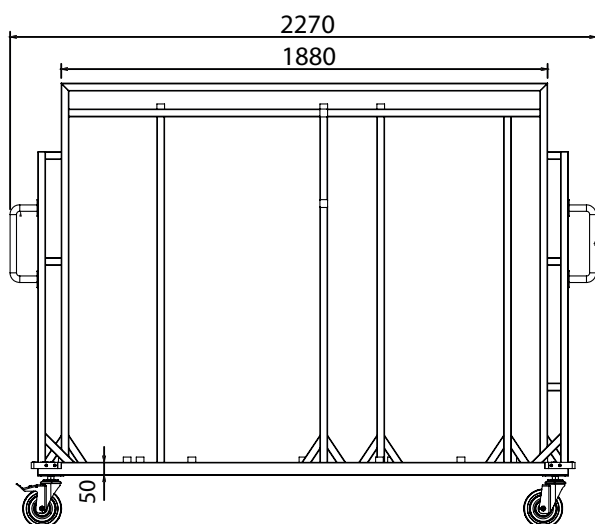

Main Features

- This product offers a safe and practical solution for carcass and panel transport operations with its robust structure and ease of use.
- **Wheels:** The product has a 2-brake and 2-unbrake wedge wheel system with a diameter of 150 mm. This structure allows for easy movement of the product and secure fixing when necessary.
- **Weight:** 90 kg. This weight supports its robust structure while providing safe use.
- **Profile Color:** The profiles of the product are manufactured as DKP with electrostatic powder coating (color optional). Thanks to the optional color option, it can adapt to different areas of use.
- **Bottom Profile Dimensions:** 30 x 50 x 1.5 mm. This profile structure contributes to increasing durability during transport.
- **Middle Upright Dimensions:** 30 x 30 x 1.5 mm. These dimensions support the robustness and structural balance of the product.
- **Push Handle Dimensions:** 30 x 30 x 1.5 mm. Provides ergonomic use, facilitating transport.
- **Ease of Use:** The product is designed for transporting carcasses and panels. Thanks to its durable structure, it offers safe use in various transport needs.
- **Overall Dimensions:** 850 x 2270 x 1718 mm. These dimensions provide a wide range of use in carcass and panel transport.
- With a 2-brake and 2-unbrake wedge wheel system (diameter: 150), electrostatic powder coated DKP profile (color optional), and durable profile dimensions, the product offers a reliable and long-lasting solution for carcass and panel transport.

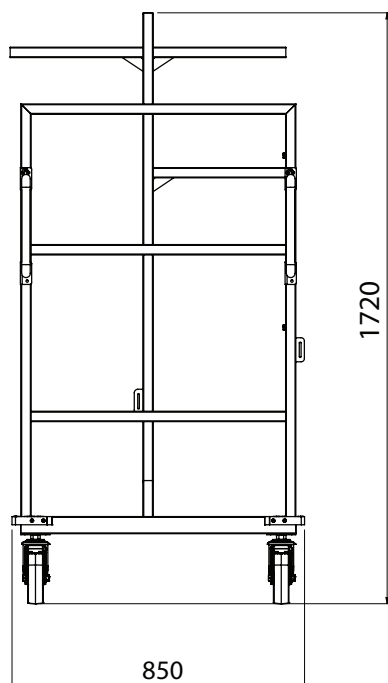

Technical Information

Wheels : 2 with Brakes, 2 without Brakes, Wedge Ø150
Weight : 90 kg
Profile Color: Electrostatic Powder Coating on DKP (Color Optional)
Bottom Profile Dimensions : 30 x 50 x 1.5 mm
Middle Upright Dimensions : 30 x 30 x 1.5 mm
Push Handle Dimensions : 30 x 30 x 1.5 mm
Ease of Use : Frame and Panel
Transport

Dimensions

Height : 850x2270x1718 mm